microlab

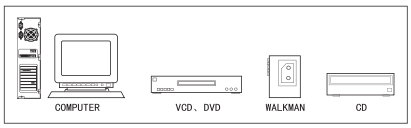

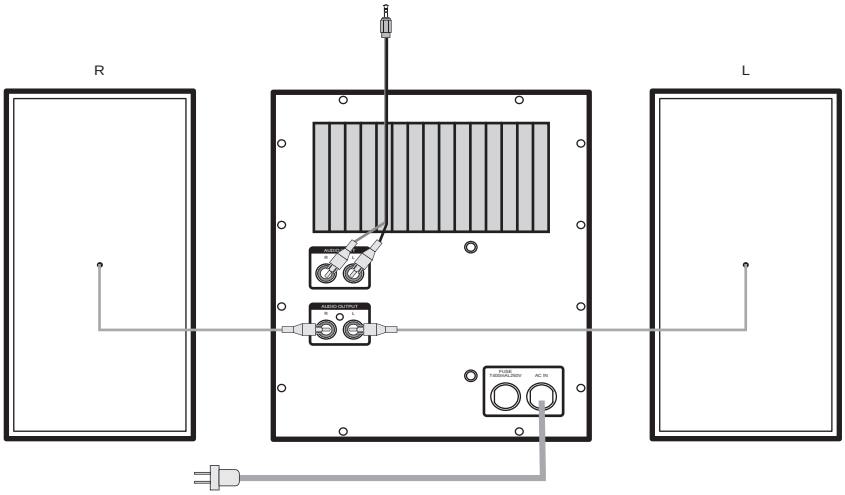

*Please note the correct placement of speaker is shown in the above picture.

Inside Package: Subwoofer Speaker 1 pc
Satellite Speakers 1 pair
Audio Cable 1 pc
User's Manual 1 pc

Connection(as diagram)
1. Connect the speaker cables to the " Audio output" L/R jacks on the back of the Subwoofer, then put the left channel satellite speaker on the left and the right satellite speaker on the right.
2. Connect the 2RCA end of the audio cable to the " Audio Input " L/R jacks on the back of the Subwoofer, and connect the 3.5mm end of the audio cable to the appropriate audio output jack of PC sound card or any other stereo audio source.
3. Make sure all the cable are connected correctly, then connect the power cord to the AC outlet.

* When you connect the headphones to your speaker, you can hear the sound from your speaker and headphones.
* Statement indicating that the socket-outlet shall be installed near the equipment and shall be easily accessible.
* The highest environmental temperature suitable for this product is 40°C.

microlab®
MULTIMEDIA SPEAKER

M-880
User's Manual

80-M880-97-0001-02 2008 01 10出

microlab

Features:
* 5.25" super bass driver aerodynamic design
* Eairbass:Departing from traditional bass technology, eairbass creates no distortion when enhancing bass. With brandnew airflow passage design, it delivers clearer sound with an extended frequency range. The use of electronic control technology enables a precise bass signal selection for enhanced bass delivery and crystal clear high notes reproduction. Moreover the sychronous phase control technology guarantees accurate bass delivery, providing an effective solution for slow frequency response. With Microlab eairbass, distortion-free, lifelike and rigoroso deep bass is possible.
* Works perfectly with PC sound cards, portable audio players, MP3 players, laptop computers and two channel audio source.

Usage:
1. Turn the TREBLE and BASS control at the center, and turn the VOLUME control anticlockwise to minimum.
2. Play a music program by adjusting the VOLUME, TREBLE and BASS control to your demanding level.

Specification
*Amplifier specification:

AC IN	220V-240V~ 50Hz 200mA
Power Output	16W x 2+27W RMS
Frequency Response	40Hz~20KHz
Harmonic Distortion	< 0.1% (1W)
S/N	>75dB
Separation	>45dB
*Speaker:	Subwoofer 5.25"
	Satellites 3"x 2
*Product size:	WxDxH
Subwoofer	180x335x210mm
Satellites	105x125x210mm

Caution:
1. Don't put the system in high temperature or humid environment, avoid from water and strong shock.
2. Don't open the cabinet to avoid electric shock or other accident. In case of damage, please ask for professional help.
3. In case of fragment or liquid fallen into the cabinet, please cut off the power and ask for professional help.
4. When using high output signal, please don't turn the volume to maximum to avoid distortion.
5. In case of long time not using, please plug off the power plug.
6. For indoor use only.

microlab®
feel the difference

80-M880-97-0001-02